


ABSTRACT

A braking device, particularly for a motor vehicle, comprising a master cylinder (10) associated with a pneumatic booster (12), and a vacuum pump (36) to create a vacuum in the vacuum chamber (16) of the booster, characterized in that the vacuum pump (36) is fixed to the envelope (14) of the booster on the inside of the latter within the vacuum chamber (16).

ABSTRACT

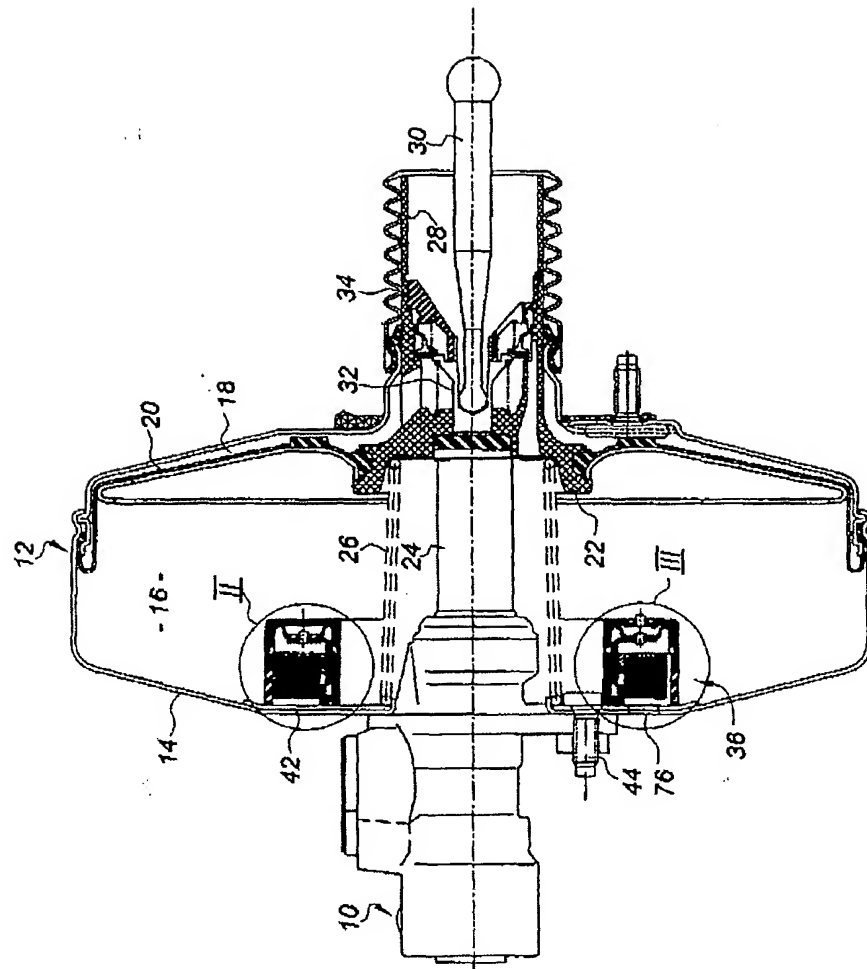

ABSTRACT

A braking device, particularly for a motor vehicle, comprising a master cylinder (10) associated with a pneumatic booster (12), and a vacuum pump (36) to create a vacuum in the vacuum chamber (16) of the booster, characterized in that the vacuum pump (36) is fixed to the envelope (14) of the booster on the inside of the latter within the vacuum chamber (16).